




Single-phase transformers with fast-on terminals

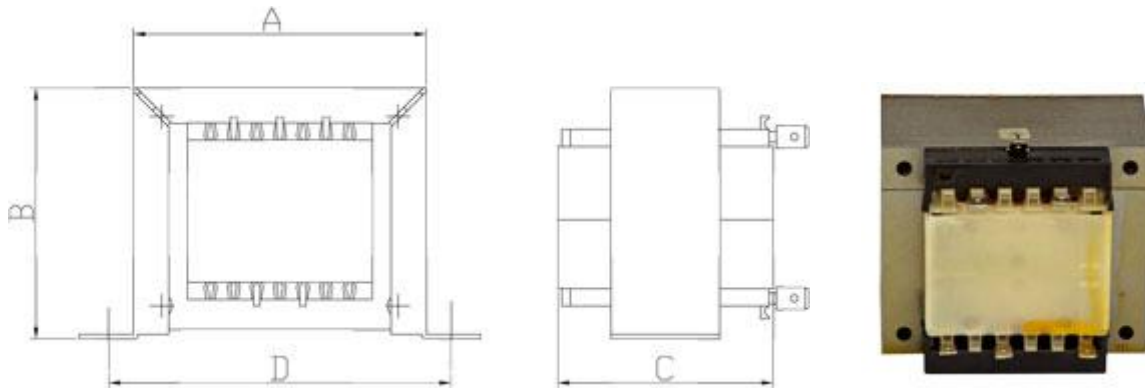

Primary voltage: upon request

Secondary voltage: upon request

Transformers for driving various electrical circuits

Can also be supplied with restorable thermal protector

Can be supplied with fastening spacers as an alternative to the galvanised metal clamp

Reference standards: CEI 96-9; EN 61558-2-2

PRODUCT NOT INTERESTED BY 204/108/CE NORM RELATED TO ELECTROMAGNETIC COMPATIBILITY EMISSIONS.

PART NUMBER	POWER [VA]	Dimension A [mm]	Dimension B [mm]	Dimension C [mm]	Dimension D [mm]
BTTMA386	30	77.5	65	53	90
BTTMA387	40	77.5	65	58	90
BTTMA388	50	77.5	65	63	90
BTTMA389	60	77.5	65	67	90
BTTMA390	70	87	77	65	100
BTTMA391	90	87	77	74	100
BTTMA392	110	87	77	80	100
BTTMA393	130	87	77	85	100
BTTMA394	150	87	77	90	100
BTTMA395	200	87	77	100	100

Notes:

1. Drawings, measurements and weights are indicative and can change without notice.

2. For powers and voltages not reported in the table or for special construction requirements, request the characteristics of the transformers from our technical office.